


PRODUCT DATA SHEET

MODE : 12V-2835-30-8MM
COLOR : 6000K-9000K

5000*8,300LED'S
CONSTANT VOLTAGE 12DC FLEXIBLE STRIP LIGHT

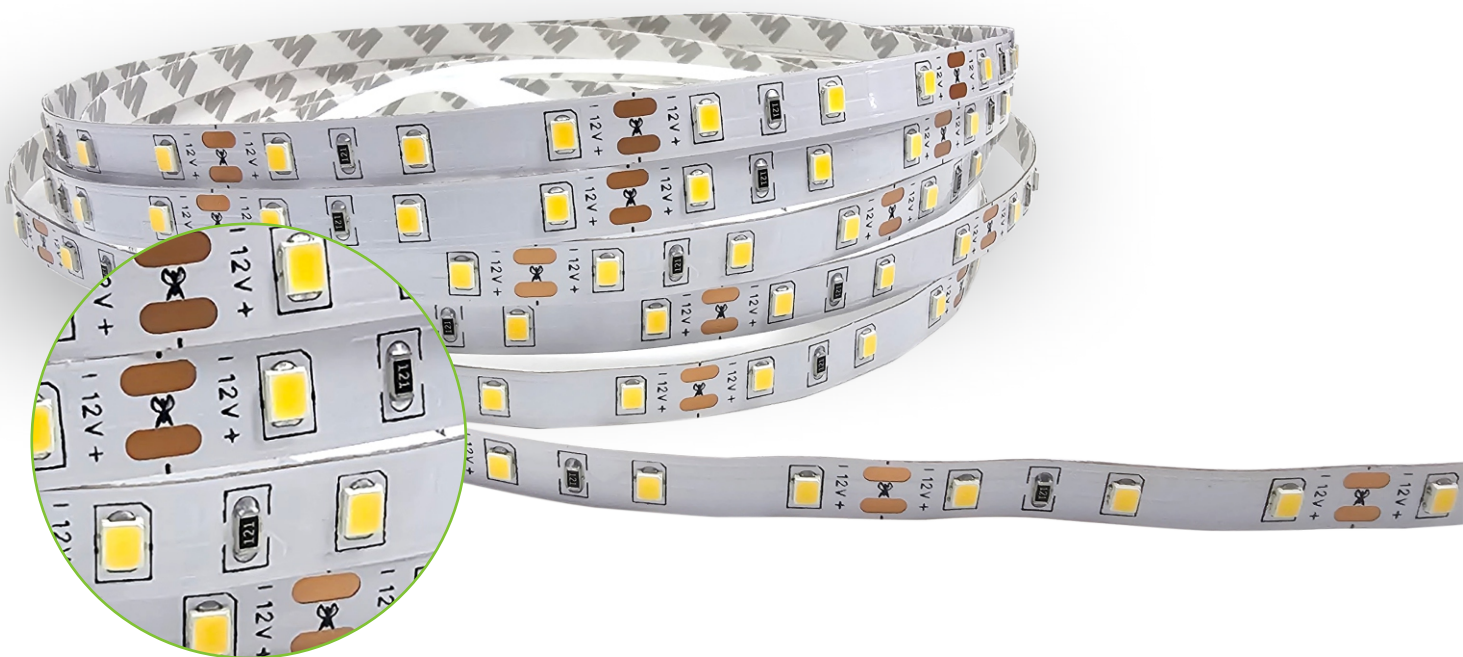

GDS-LS2835.60.12.30.IP20

UL	CE	RoHS	2835 SMD	60 LEDS	WATTS 30	DC 12V	IP 20	3 YEARS WARRANTY
----	----	------	-------------	------------	-------------	-----------	----------	------------------------

PRODUCT FEATURES

- SUPER BRIGHT 2835 SMD, 60 LED/M, 6W, 12V/24V.
- UNIFORM COLOR, EVEN LIGHT, NICE LOOKING.
- HIGH EFFICIENCY, LOW LIGHT DECAY, LONG LIFESPAN 50 000 HOURS.
- LOW INPUT VOLTAGE DC 12V OR 24V, SAFE TO HUMAN BODY.
- 3M SELF-ADHESIVE AT BACK IS EASY FOR DIY INSTALLATION.
- CE & ROHS COMPLIANT.
- EVERY 3-LED CUTTABLE (12V) OR 6-LED CUTTABLE (24V)
- WARRANTY: 3 YEARS.

APPLICATIONS

- INDOOR ILLUMINATION AND DECORATION IN HOME, HOTEL, SHOPPING MALL, CINEMA, MUSEUM, BAR, SHOWING ROOM, JEWELRY COUNTER, ETC.



TECHNICAL PARAMETERS

EMITTING COLOR	CCT/ WAVELENGTH	LUMINOUS FLUX	INPUT VOLTAGE	POWER	LED TYPE	LED QUANTITY	IP RATE
PURE WHITE	6000~6500K	900 LM	DC 12V/24V	6W/M	2835 SMD	60 PCS/M	IP20
WARM WHITE	3000~3300K	900 LM	DC 12V/24V	6W/M	2835 SMD	60 PCS/M	IP20
COLD WHITE	8000~9000K	900 LM	DC 12V/24V	6W/M	2835 SMD	60 PCS/M	IP20


OTHER PARAMETERS

PACKAGING	WORKING TEMPERATURE (°C)	STORAGE TEMPERATURE (°C)
5M/REEL	-20~+50	-25~+60

DIMENSION

UNIT IN MM




Length/Reel	Width	Height	LED Spacing	Min. Cutting ✂
5000mm	8mm	1.5mm	16.7mm	Every 50mm (3LEDs)

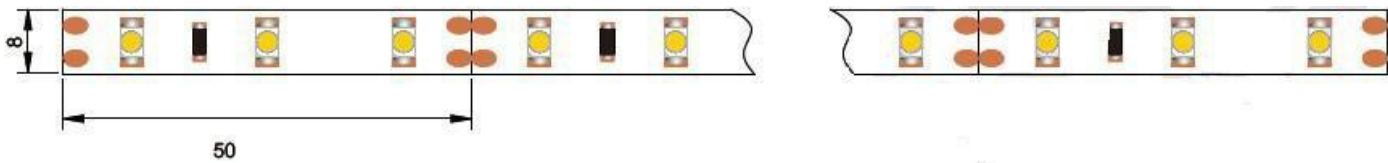

CUT LINE




CONNECTION LAYOUT

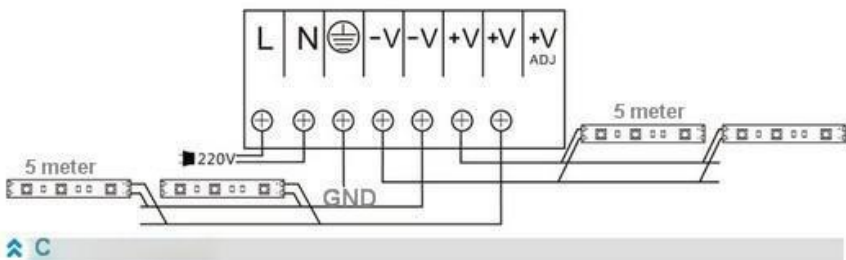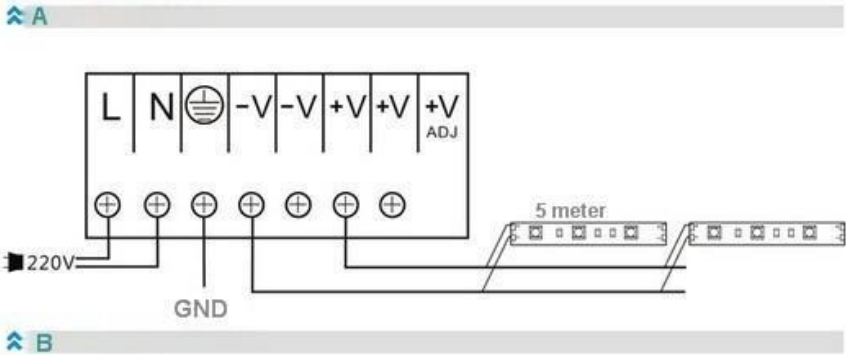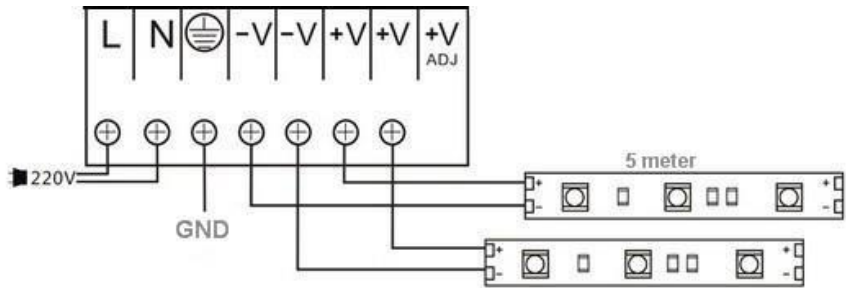


PACKAGE



Roll the LED
Strips into the
reel



Label stick on
ESD bag



Put into the
outer carton



Sealing

- 5M/REEL, 350M/CARTON.
- CARTON SIZE: 52*30*22CM, 0.03432CBM.
- VOLUME METRIC WEIGHT 7KG.
- GROSS WEIGHT 6 KG.

COMMON PROBLEM AND SOLUTIONS

- PLEASE CHECK IF POWER SUPPLY IS CONNECTED, OR IF THE SWITCH IS IN THE CONNECTED POSITION WHEN THE LIGHT DOES NOT WORK.
- IF THE LAMP LIGHTS ON AND OFF FREQUENTLY, PLEASE CHECK CONNECTION BETWEEN POWER SUPPLY AND STRIP IN CASE THAT IT IS LOOSE.

NOTE : IF THE LIGHTS STILL DOES NOT WORK WELL AFTER TRYING THE METHODS ABOVE, PLEASE CONTACT PROFESSIONAL STAFF FOR HELP.

ATTENTIONS

- PLEASE DO NOT CONNECT POWER SUPPLY WHEN THE LIGHT IS STILL IN BAG.
- PAY ATTENTION TO FIRE, ELECTRICITY AND SHAKE
- PLEASE DO NOT CONNECT HIGH VOLTAGE BEFORE THE INSTALLATION, AND MAKE SURE THAT THE FIXTURE CONNECTS THE EARTH
- PLEASE DO NOT USE ROUGH OR CLEANSER TO CLEAN THIS PRODUCTS, DO NOT USE HIGH PRESS WATER TO WASH THIS PRODUCT THAT IT WOULD BE HARMFUL FOR THE WATERPROOF COMPONENTS.
- PLEASE DO NOT USE SHARP EQUIPMENT TO STAB THIS PRODUCT, OR IT MAY BROKEN THE INTERNAL COMPONENTS.
- PLEASE DO NOT PULL OR PRESS TOO MUCH ON THE PRODUCTS.
- ONCE THE LIGHT REACHES THE LIFESPAN, PLEASE CONTACT YOUR LOCAL RELATIVE AUTHORITY OR RETAILER TO ASK FOR RECYCLE SUGGESTION.
- RECOMMENDED WORKING ENVIRONMENT TEMPERATURE IS -20~40 .
- PLEASE DO NOT USE THE LIGHT IF THE FIXTURE OR WIRE HAS PROBLEM, CHECK AND REPAIR FIRSTLY.
- THE LIGHT SHOULD BE INSTALLED BY PROFESSIONALS.

*IF THERE IS ANY CHANGE FOR THE PRODUCT, WE WILL NOT INFORM AGAIN.


*IF YOU HAVE ANY QUESTION ABOUT THE SPECIFICATION, PLEASE ASK QUALIFIED ENGINEERS FOR HELP.

NOTICE :


IF THE LIGHT BECOMES BROKEN BECAUSE OF MISUSE OF OTHER ACCESSORIES WHICH ARE NOT FROM OUR COMPANY, WE ARE NOT RESPONSIBLE THIS ISSUE.

✂ INSTALLATION


(REMARK THE POSITIVE AND NEGATIVE WIRE NEED TO BE CORRECTLY CONNECTED TO THE POSITIVE AND NEGATIVE TERMINALS OF THE POWER SUPPLY OUTPUT.)

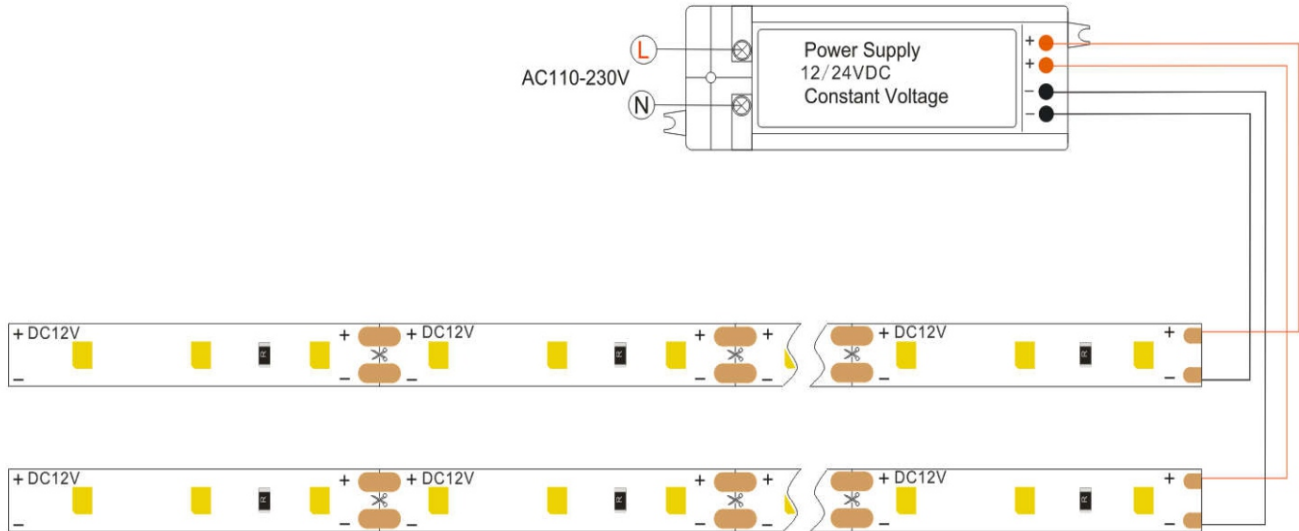


INSTALLATION STEP INSTRUCTIONS AND PRECAUTIONS

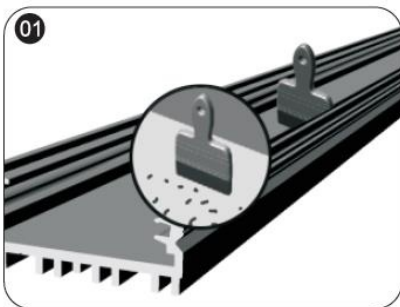

© Clean up debris on the mounting surface to ensure surface cleaning

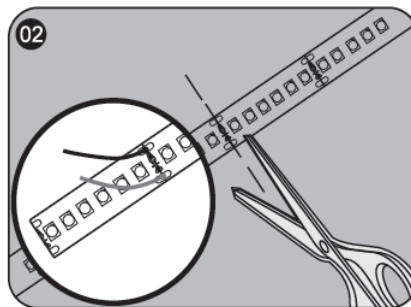


© Measure the length of the strip to be installed, and cut the extra LED strip along the scissors marking line. If you need to increase the connecting wire, please weld it at the next scissors mark at the cut.

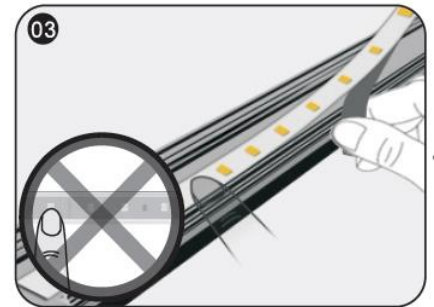

© When attaching the led strip, be careful to peel while sticking. It is strictly forbidden to tear off all the release paper at once to prevent the led strip from sticking to each other.
△ Note: Do not press the lamp beads!




© The position of the led where scissors are in contact with the bottom of the section need to isolate with sticker tape, so as to avoid short circuit.

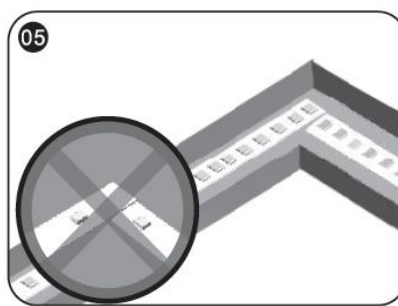


© The light strip at the corner is installed as shown above
△ Note: Do not fold into a right angle
Direct bending on the surface of the profile is strictly prohibited




© After the strip is installed, it is connected to the power output. Insulation, short - circuit protection and corrosion protection should be done at the terminals



© Don't bend the LED position



© Don't twist the led strips

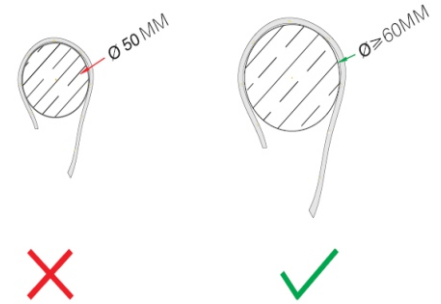

© Don't wrap objects less than 5cm in diameter

COMMON FAULTS OF PRODUCTS AND TROUBLESHOOTING METHODS

Fault phenomenon	Potential causes	Solution
All LEDs are off	1、The power is off.	power transmission
	2、Automatic protection of the power supply after the output of the switching power supply is open or shorted.	trouble shooting and recovering the power supply
	3、LED Strips with power supply terminal polarity reverse	Check the wire connection to ensure correct connection of positive and negative wire
Some of the LEDs are off	1、Part of the switching power supply is not powered	Check the power supply system and troubleshoot
	2、Part of the electricity supply line error	
	3、Partial led strips with reverse polarity connection	Correct connection
LED brightness is not the same or the brightness is not enough	1、Power overload	Replace the power supply with a larger power according to the load
	2、Switching power supply line or circuit loss is too large	Ensure that the operating voltage of the led strips is within $\pm 5\%$ of the rated voltage 1. Cut the length of the wire between the strip and the power cord or use wires with larger diameter; 2. Ensure that the number of each led strip is less than or equal to the maximum allowable cascade ;And make each strip with a similar connection.
	3、Over connection of LED Strips	Adjust the number of strips for each power supply and to meet the maximum connection requirements for each power supply.
LED flashing	1、Poor contact at the wiring point	Find out the bad points and troubleshoot
	2、Switching power supply failure	Replace the switching power supply

COMMON FAULTS OF PRODUCTS AND TROUBLESHOOTING METHODS

- © If the external cord of the product is damaged, it should be replaced by the manufacturer or its service agent or a similarly qualified person to avoid danger.
- © For the specific installation and precautions of the product, please refer to the product manual.
- © The data above in this specification is based on standard products. Actual shipments may be a little difference. Please refer to the actual product.
- © All product drawings in this specification are schematic diagrams, and actual shipments may be a little difference. Please refer to the actual product.