

PRODUCT DATA SHEET

MODE : 12V-5050-60-10MM

COLOR : WARM WHITE ,NATURAL WHITE ,COOL WHITE

5000*10,300LED'S

CONSTANT VOLTAGE 12DC STRIP LIGHT



GDS-LS5050.60.12.60.IP20

UL

CE

RoHS

5050
SMD60
LEDSWATTS
60

**DC
12V**


IP
303
YEARS

PRODUCT FEATURES

LED CHIP	5050LED
PCB SIZE	L5000MM*W10MM*H0.5MM
LED QTY	150PCS & 300PCS & 600PCS LED/5METERS
LED COLOR	WARM WHITE ,NATURAL WHITE ,COOL WHITE
INPUT VOLTAGE	12VDC
MAX POWER	12W/1METER
BRIGHTNESS(LM/W)	83-92LM/W
IP RATINGS	IP20
WARRANTY	3 YEARS

APPLICATIONS

- INDOOR ILLUMINATION AND DECORATION IN HOME, HOTEL, SHOPPING MALL, CINEMA, MUSEUM, BAR, SHOWING ROOM, JEWELRY COUNTER, ETC.

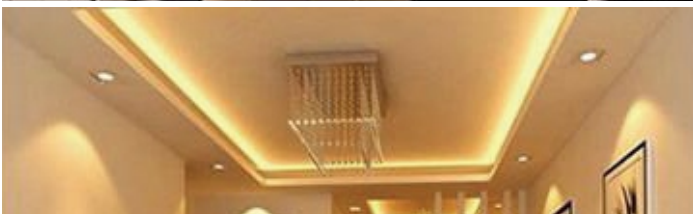


DIMENSION


UNIT IN MM


Length/Reel	Width	Height	LED Spacing	Min. Cutting ✂
5000mm	10mm	0.5mm	22mm	Every 50mm (3LEDs)

DC12V

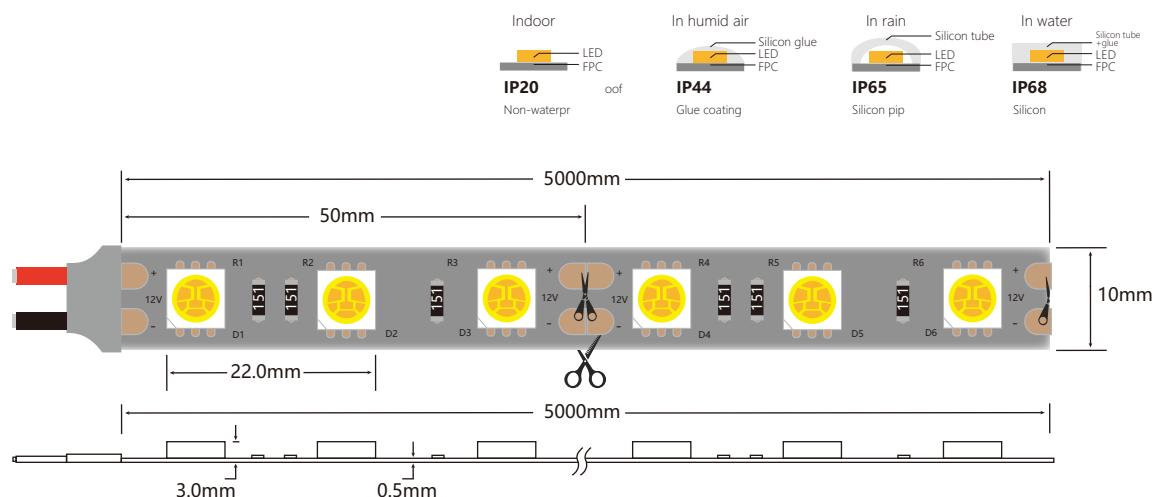


✂ 5050 LED STRIP - 30LED DETAILS

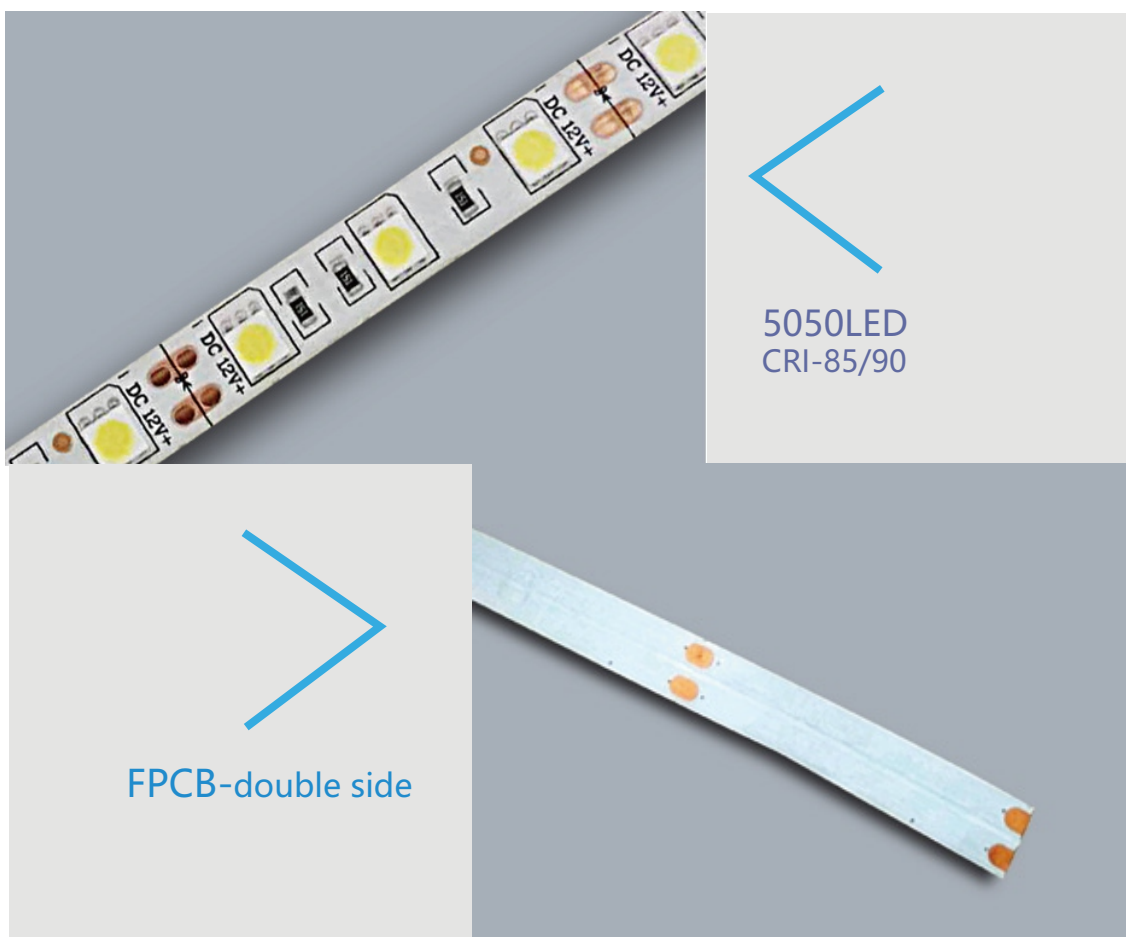

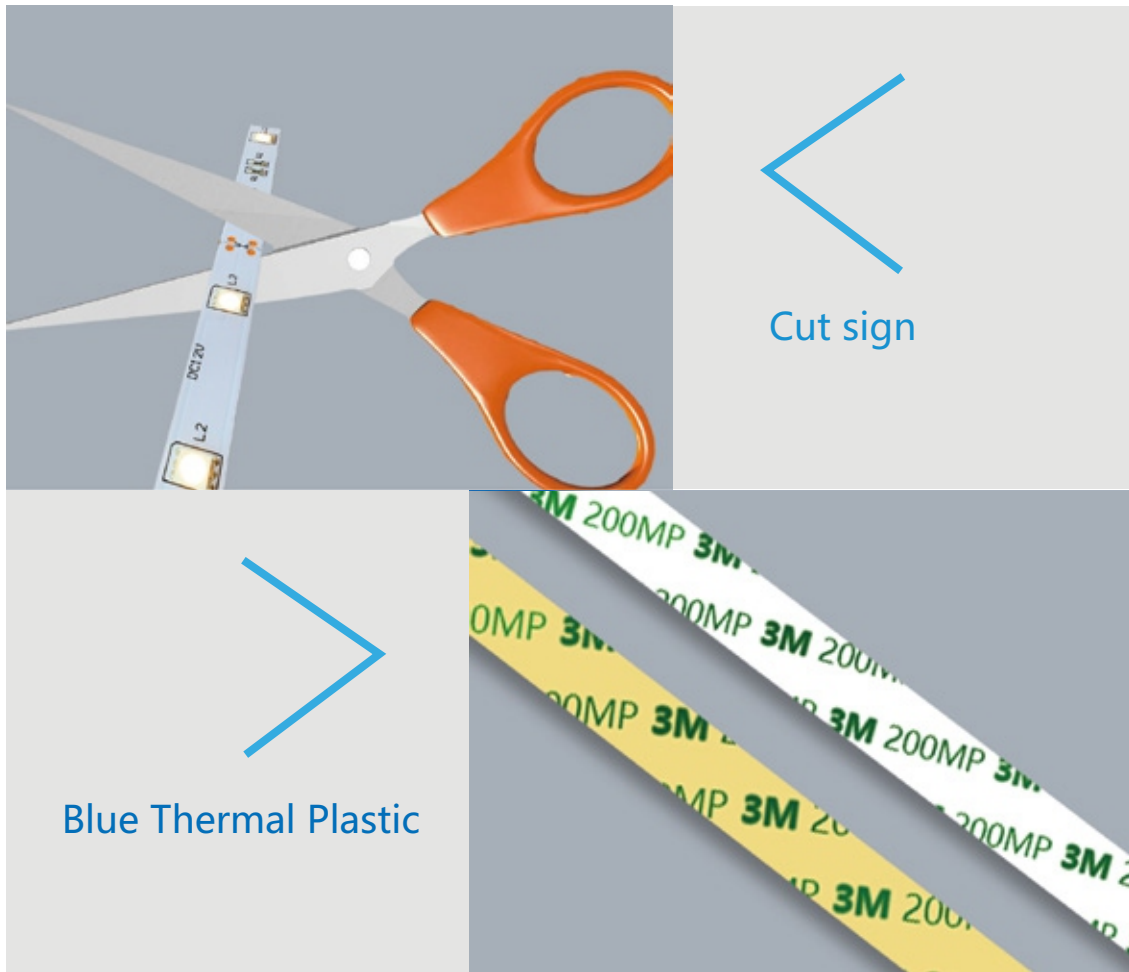

PACKAGE

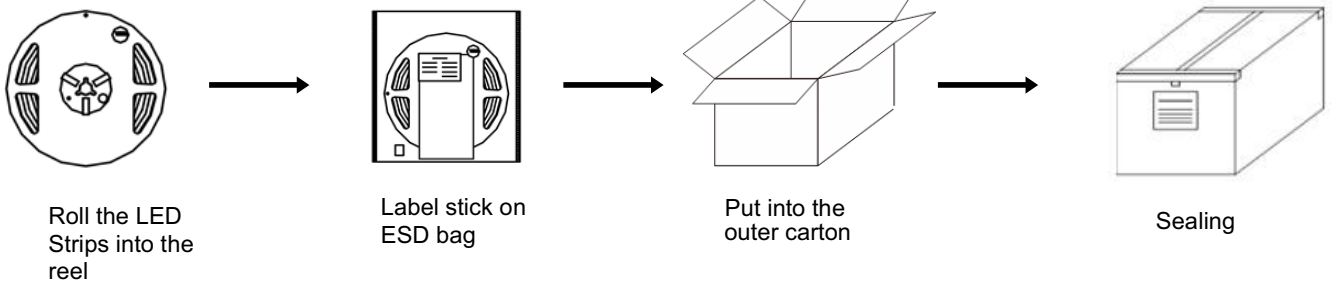

- 5M/REEL, 1 REEL/ANTI-STATIC OPP BAG.
- CARTON SIZE: 52*37*26CM.
- 100 BAGS TO 1 INNER BOX.
- GROSS WEIGHT NON-WATERPROOF0.12KG.



NOTE

EACH LIGHTS ARE CONNECTED WITH BRIDGE RECTIFIER AND A PLUG, JUST PLUG INTO THE POWER OUTLET TO MAKE EASY USE. PLEASE SPECIFY POWER BEFORE USING THE PRODUCT, ENSURE THAT THE POWER LINE IS NOT OVERLOADED, THE CIRCUIT PROTECTION CIRCUIT, SUCH AS A POWER OUTLET WITH FUSE OR PICK UP THE RCD. PLEASE REFER TO THE USE OF PHOTO VOLTAGE TECHNOLOGY AND PRODUCTS. THE PARAMETER CONTENT TO ENSURE THAT WORK WITHIN THE PARAMETERS OF VOLTAGE $\pm 5\%$ RANGE.

FOR CUSTOM LENGTH SHOULD BE 0.5 / 1 METER UNIT GROUP CUT WELDING POSITION, CAN NOT BE LESS THAN THE MINIMUM UNIT LENGTH DEGREE OR SHEAR IN THE CELL GROUP. AFTER THE CUT SHOULD BE NOTED, A GOOD INCISION WATERPROOF INSULATED RUBBER SEAL, SO AS NOT TO BURN. BAD PRODUCT OR A SECURITY INCIDENT (THE LOSSES CAUSED BY THE PRODUCT SUPPLIER IS NOT RESPONSIBLE). DIVISION I IS NOT. GUESTS ARE ADVISED TO TRIM THE LENGTH OF THEIR OWN, SUCH AS THE DEMAND FOR NON-STANDARD LENGTH OF THE PRODUCT, PLEASE CONTACT OUR MARKETING STAFF.

DO NOT TWIST THE LAMP WITH FOR CONTINUITY, REPEATED BENDING FATIGUE EASILY LEAD TO INTERNAL POWER LINE DAMAGE. WE SHOULD BE PREPARED TO USE THE INDOOR SAFETY PRECAUTIONS TO AVOID REDUCTION OF FIRE, ELECTRIC SHOCK AND INJURY.

THE PURPOSE OF THIS PRODUCT IS STABLE WORK, PLEASE RETURN THE PRODUCT FOR A NUMBER OF WELL-VENTILATED PLACE. NON-WHOLE VOLUME LIGHTS LIT ROLLED TOGETHER.

IN ORDER TO ENSURE THE LIGHTS WITH LIFE, WE RECOMMEND THE USE OF THE PROCESS CAN NOT PULL THE CORD IS PROHIBITED TO TOUCH. HIT THE LIGHTS AND SQUEEZE THE BEAD SURFACE. LIGHTS INSTALLED, MUST BE FIRMLY FIXED, THERE IS NOT FLOWING, SWINGING PHENOMENON. OTHERWISE THE LAMP WIRES FATIGUE FRACTURE, DAMAGE TO THE LIGHTS;

THE LIGHTS CAUGHT THE TAIL END MUST PLUG WITH TAIL; WHEN USED OUTDOORS, THE INTERFACES MUST BE SOLID, NO SHORT CIRCUIT RISK, HOUSEHOLD. WHEN INSTALLED OUTSIDE, EACH INTERFACE MUST BE GLASS, PLASTIC OR OTHER APPROPRIATE MEANS SEALING INTERFACE, ENSURE THAT ALL INTERFACES, NO WATER INSIDE.

FIXED, DO NOT USE WIRE AND OTHER METAL WIRE MATERIAL TIGHT TO AVOID THE LAMP INTO THE LAMP STRIP, RESULTING IN SHORT ROAD DRAIN, BURNING LIGHT STRIPS.

THE LIGHT BAR HAS FOUND DAMAGED SKIN, PLEASE IMMEDIATELY CUT OFF THIS UNIT CAN NOT CONTINUE TO USE, IN ORDER TO AVOID DANGER;

THIS PRODUCT IS NOT A TOY FOR CHILDREN, BUT EASILY LEAD TO INTEREST CHILDREN, INSTALL THE REACH OF CHILDREN OR USED UNDER ADULT SUPERVISION. STRICTLY PROHIBITED DIRECTLY USED IN SOME SWIMMING POOLS, RIVERS AND OTHER PERSONS CLOSE PLACE CUT CONTACT, TO PREVENT ACCIDENTS