


PRODUCT DATA SHEET

MODE : 12V-2835-0.72W

COLOR : 7000&9000K

66*15*8MM

CONSTANT VOLTAGE 12DC MODULES

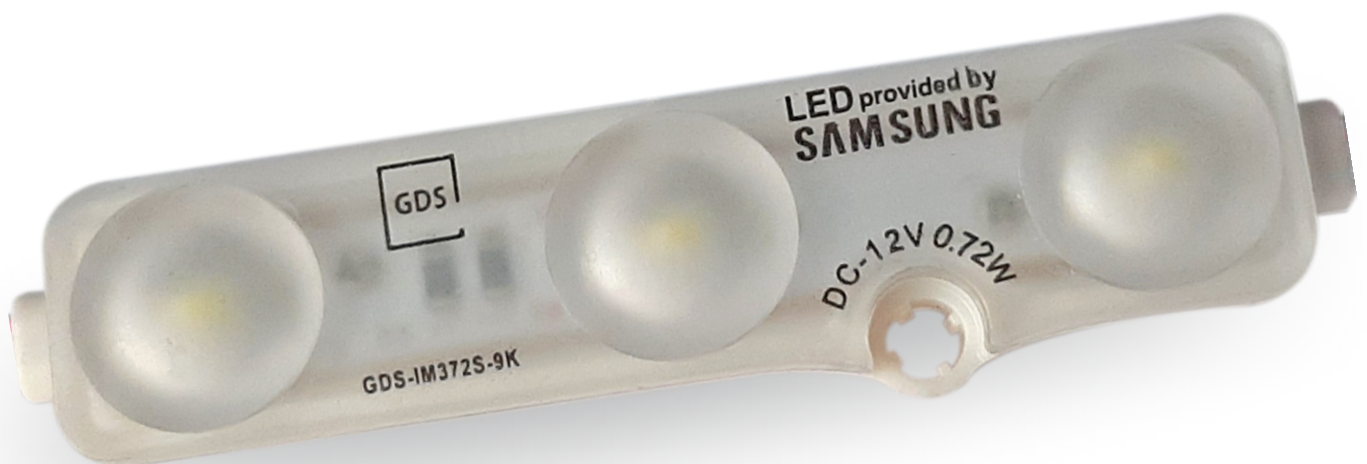

SAMSUNG

GDS-IM-372S



PRODUCT FEATURES

- HIGH LIGHT EFFICIENT 2835 SMD
- LED LOW VOLTAGE DC 12V
- LOW POWER DISSIPATION 0.72W
- WATERPROOF TESTED IP65 TESTED
- PRODUCTS THROUGH CE,ROHS CERTIFICATION
- 3 YEARS WARRANTY

APPLICATIONS

- COMMERCIAL SPACE, RESIDENTIAL LIGHTING, OUTDOOR LIGHTING, SIGNAGE AND DISPLAYS, AUTOMOTIVE LIGHTING, HOSPITALITY, ARCHITECTURAL LIGHTING, MUSEUM AND ART LIGHTING, ETC,.




TECHNICAL PARAMETERS


NAME	SAMSUNG 2835 LED MODULE
LED TYPE	2835SMD
CCT(K)	7000K & 9000K
BEAM ANGLE	160°
LED	3 PCS
LUMINOUS FLUX	150-165LM
WORKING VOLTAGE	DC12V
POWER	0.72W
FORWARD CURRENT	120
WEIGHT	0.9
MODEL PITCH	89
SHELL SIZE	66*15*8
LIFE SPAN	50000HRS
SHELL COLOR	WHITE COLOR
OPERATING TEMP.	-20C-+60C
IP RATE	IP65 WATERPROOF
ACCESSORIES NEED	POWER SUPPLY, CONNECTOR
CABLE	UL,20A
WARRANTY	3 YEARS

DIMENSION



UNIT IN MM

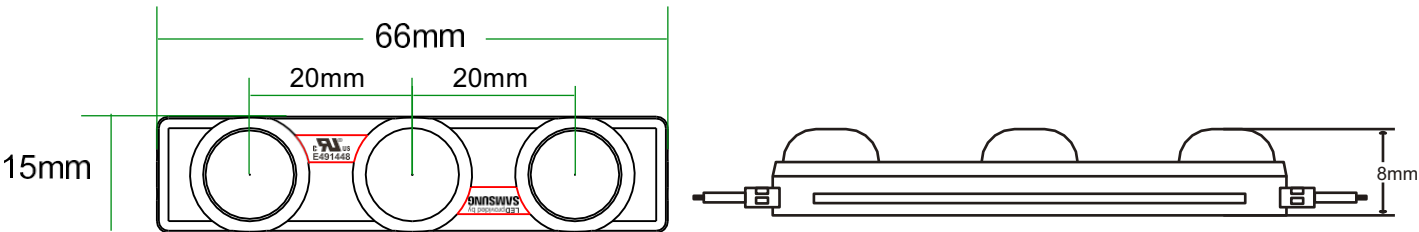

BEAMING ANGLE

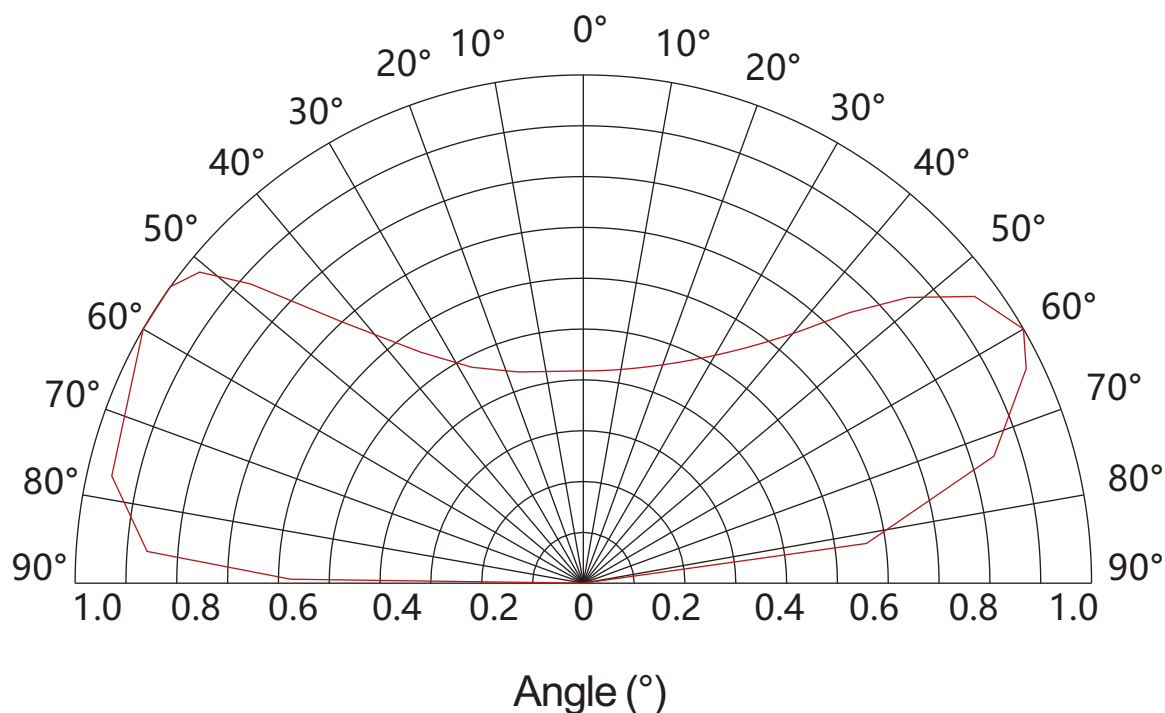


CIE COLORIMETRIC PARAMETERS

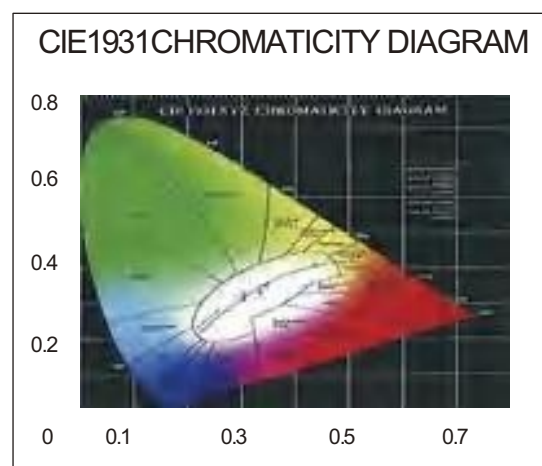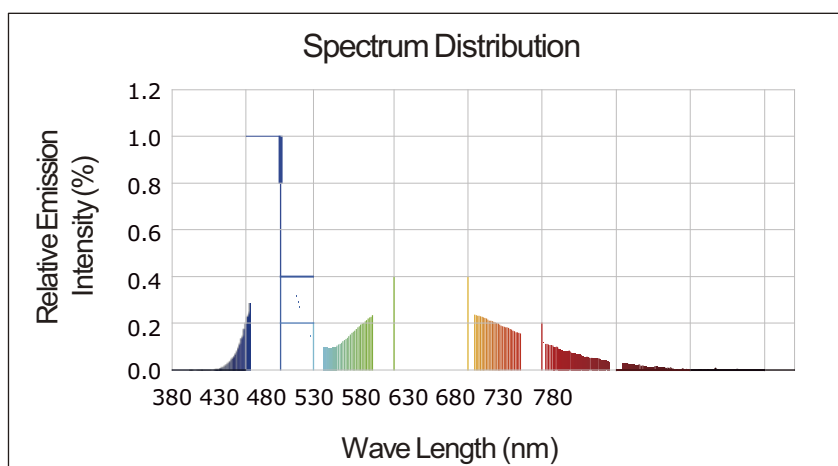

CONNECTION LAYOUT

AC 220V INPUT

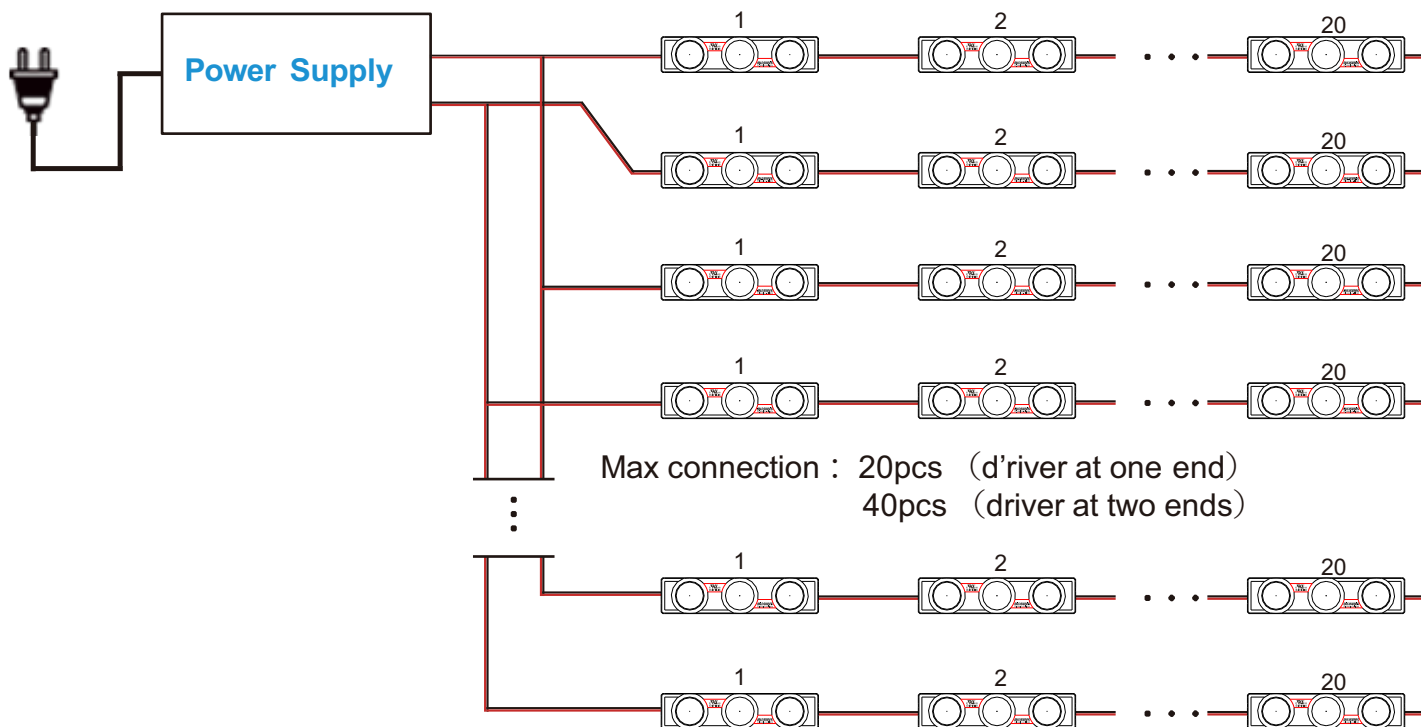

THE NUMBER OF STANDARD MODULES PER STRING CAN REACH TO 40PCS