


PRODUCT DATA SHEET

BACKLIT ALUMINIUM PROFILE
COLOR : ANODISED SILVER

43MM * 15MM
LENGTH : 5.8M

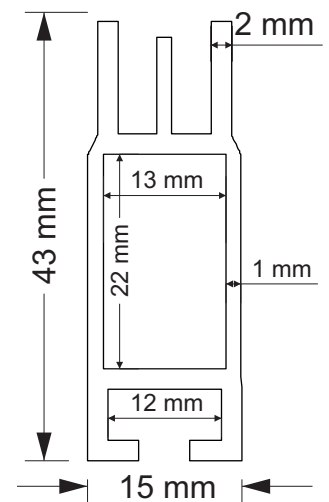

CUBE FABRIC
ALUMINIUM PROFILE

SPECIFICATION

FINISHES

MATERIAL	: ALUMINUM
COLOR	: SILVER ANODIZED
FINISH TREATMENT	: MATT

NOTE:

- 1.ALL SPECIFICATIONS NEED TO COMPLY WITH ALL RESPECTIVE FEDERAL, LOCAL, AND LANDLORD-SPECIFIC CODES AND REGULATIONS.
- 2.WHERE THE CONTRACTOR PLANS TO USE MATERIALS THAT HAVE ALREADY BEEN USED IN THE BASE BUILD, THE CONTRACTOR SHOULD CONSIDER THE SAME MATERIAL AND SUPPLIER FOR FURTHER WORKS, AS REQUIRED.

TECHNICAL PARAMETERS

ITEM CODE	CUBE FABRIC PROFILE
PROFILE SIZE	43 X 15 X 5800 MM
ALUMINUM THICKNESS	1-2MM
WEIGHT	AROUND 0.52KG/M
ALLOY & TEMPER	6063,T5
STANDARD	GB5237-2008
OPEN WAY	FABRIC EMBEDDED
ASSEMBLING	USE METAL CONNECTOR TO COMBINE ALUMINIUM PROFILE INTO A FRAME
COLOUR	SILVER ANODIZED OTHER COLORS CAN BE CUSTOMIZED
LENGTH	5.8M/PIECE, OTHER LENGTH CAN BE CUSTOMIZED
TYPE	DISPLAY WITH BRANDING ON ALL SIX FACES
INSTALLATION	HANGING / WALL
USAGE	PICTURE FRAME /
GRAPHICS MATERIAL	FABRIC OR PVC
APPLICATION	TRADESHOW, SHOPPING MALL, AIRPORT, METRO STATION, ETC.

PROOF STRESS	:	170 MIN MPA
TENSILE STRENGTH	:	215 MIN MPA
ELONGATION A50 MM	:	8 MIN%
HARDNESS BRINELL	:	75 HB
ELONGATION A	:	10 MIN%

CHEMICAL PROPERTIES

CHEMICAL ANALYSIS (%) :

	MIN	MAX
Si	0.2	0.6
Fe	0.0	0.35
Mg	0.0	0.1
Mn	0.45	0.9

DIMENSION

UNIT IN MM

OVERALL :

SIZE	:	43 X 15 MM
LENGTH	:	5800 MM
THICKNESS	:	1-2 MM
WEIGHT	:	AROUND 0.52KG/M

EXECUTION

GENERAL	:	REFER TO THE DRAWINGS AND DESIGN CATALOGUE.
CONSTRUCTION	:	CONSTRUCTION AND MOUNTING METHOD TO BE DONE ACCORDING TO MANUFACTURE SPECIFICATION.