
PRODUCT DATA SHEET

MATERIAL : PE FOAM TAPE

SIZE : 12MM X 7M | 19MM X 7M | 25MM X 7M | 50MM X 7M

THICKNESS : 1000 MICRON

ADHESION CAPACITY(TO STEEL) : 1.1KG PER INCH



PE FOAM TAPE
(1000 MICRON)


CHARACTERISTIC

PE BACKING MATERIAL. STRONG ADHESIVE, GOOD MITIGATING VIBRATILITY, STRONG CRACK RESISTANCE, HIGH TEMPERATURE RESISTANCE, HIGH SEAL PROPERTY.

APPLICATIONS

- APPLICABLE FOR PERMANENT FIXING.
- FOR IRREGULAR SURFACE.
- FOR MOUNTING DECORATIVE OBJECTS IN CARS, MACHINES OR HOUSES.

STRUCTURE

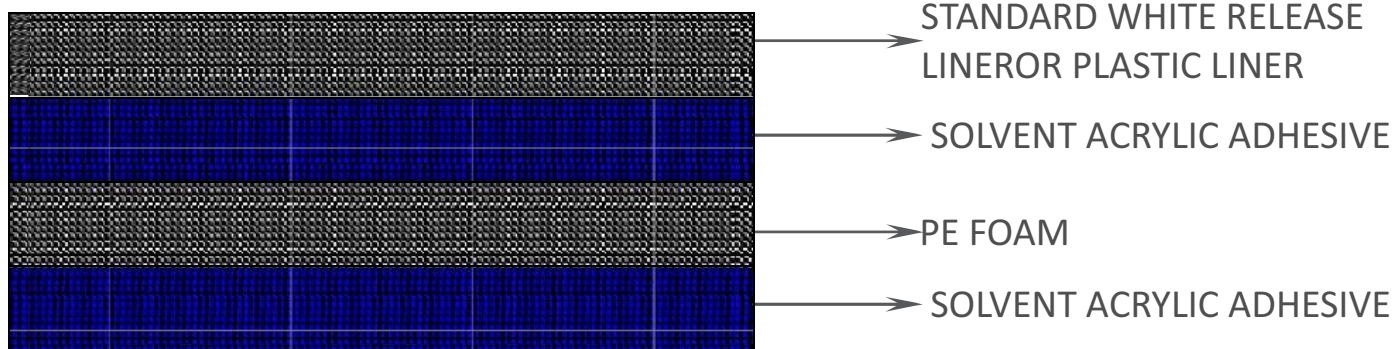

CAPABILITY, PERFORMANCE CHARACTERISTICS

ITEM		STANDARD	TEST CONDITION
THICKNESS (MICRON)		1.0±0.005	-
CARRIER		PE FOAM	-
DENSITY(KG/M3)		50	-
COLOR		WHITE	
INITIAL TACK : 14#STEEL BALL(MM)		<150	GB/T 4852-2002
PEELING STRENGTH (N/25MM)		>12	GB/T 2792-1998
HOLDING POWER	STANDARD TEMPERATURE 23°C (MINUTE)	>1440	GB/T 4851-1998
TEMPERATURE(°C)		-20°C to +120°C	-

NOTE: Information in the above sheet are the average value of the tests, they should not be taken as the exact values of every single product. Customers have the obligation to check whether the product is suitable for their own applications.