

OPS-30024(220-240V)-67



Benefits

Small housing design for mounting on the cove or into linear luminaires
Versatile scope of application due to output power range of up to 300W
Robust and durable design for outdoor application

L	264 mm
L1	249 mm
B	68 mm
H	39.5 mm

Applications

In areas as hotels, luminous Signage, cruises ship, Public squares and architecture lighting
Suitable for indoor and outdoor SELV installations

Approvals



In preparation, if not already printed on product label

Product Features

- Suitable for Class I/II luminaire
- SELV, U_{out}:24.2V
- Wide t_a range -40 °C ... +50 °C
- Driver with output power range of up to 300 W
- High efficiency up to 93 %
- Smart Power Supply
- THD<5% at full load
- High IP protection (IP66 & IP67)
- High surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Mains voltage: 220 – 240 V_{AC}
- Overload protection
- Over temperature protection
- Short circuit protection
- 50'000 h lifetime at t_c 80°C.
- 5 years guarantee*

*10% cumulated failure

Electrical specification




	Item	Value	Unit	Remarks
Input	Nominal voltage	220 – 240	V	
	Mains frequency	50 / 60	Hz	
	Input voltage AC	198-264	V	
	Nominal current	<1.7	A	Full load, 230 Vac, 50 Hz / 60 Hz
	Total Harmonic Distortion (THD)	<5	%	Full load, 230 Vac, 50 Hz / 60 Hz
	Power factor	0,95		Typical, Full load, 230 Vac, 50 Hz / 60 Hz,
	ECG Efficiency	93	%	Typical, Full load, 230Vac, 50Hz,
	Power loss in no load condition	<1	W	230Vac, 50Hz
	Protection class	I		
	Suitable for fixtures with prot. Class	I / II		
	Inrush current	60	A	At Full Load ,240VAC,Cold Start Duration=800uS 50%Ipk—50%Ipk
	Max. ECG no. on circuit breaker 10 A (B)	2		
	Max. ECG no. on circuit breaker 16 A (B)	4		
	Max. ECG no. on circuit breaker 25 A (B)	7		
	Max. ECG no. on circuit breaker 10 A (C)	4		
	Max. ECG no. on circuit breaker 16 A (C)	7		
	Max. ECG no. on circuit breaker 25 A (C)	12		
Output	Nominal output voltage	24,2	V	
	Voltage accuracy	+/- 3	%	
	Voltage ripple	<2	%	Vpk-pk at 100 Hz; Full load
	Nominal output power	300	W	
	Device power loss	22.5	W	
	Maximum power	300	W	
	Capacitive load	20	uF/A	Linear modules allowed
	Galvanic isolation	SELV		
	U-OUT (working voltage)	<25.5	V	
Environmental	Ambient temperature range	-40...+50	°C	Fullload, Tc not exceeded
		+50...+70		Load derating, Tc not exceeded, Refer to derating curve
	Max. temperature at tc test point	90	°C	Measured on tc point indicated of the prod label, ta not exceeded
	Storage temperature range	-40...+85	°C	
	Permitted rel. humidity during operation	5 ... 85	%	Not condensing
	Surge capability (L/N)	4	kV	L/N acc to. EN 61547
	Surge capability (L-N/PE)	6	kV	L-N/PE acc to. EN 61547
	Environmental rating	Outdoor		
	IP protection class	IP 66 & IP 67		
	Mains switching cycles	> 100'000	cycles	At Ta=25 °C
	Expected ECG lifetime	50'000	h	tc = 80°C(TBD) - 0,2% / 1'000 h failure rate
	No-load proof	Yes		
	Overheating protection	Yes		Auto recovery
	Overload protection	Yes		Auto recovery
	Short-circuit protection	Yes		Auto recovery
Dimension	Height	39.5	mm	
	Length	264	mm	Include mounting hanger
	Width	68	mm	
	Casing material	Metal		




	Mounting hole spacing, length	249	mm	
	Net weight	1341	g	
Input	Colour L and N	Blue / Brown/ Yellow and Green		
	Cable cross selection	1,0	mm ²	H05RN-F/3x1.0 mm ²
	Wire preparation length	60	mm	
	Wire peeling length	10	mm	
	Lead length	300	mm	
Output	Colour + and -	Red / Black		
	Cable cross selection	2,5	mm ²	H07RN-F/2x2.5 mm ²
	Wire preparation length	60	mm	
	Wire peeling length	10	mm	
	Lead length	300	mm	

Protection

Over temperature, Overload, Short-circuit, open-circuit, Reversible.

Dimension:

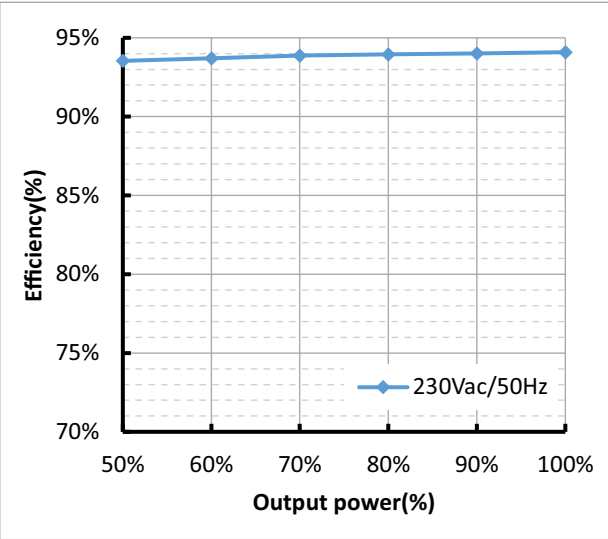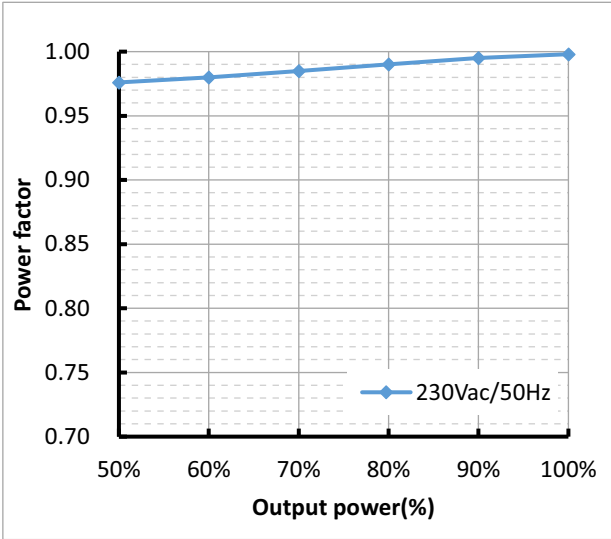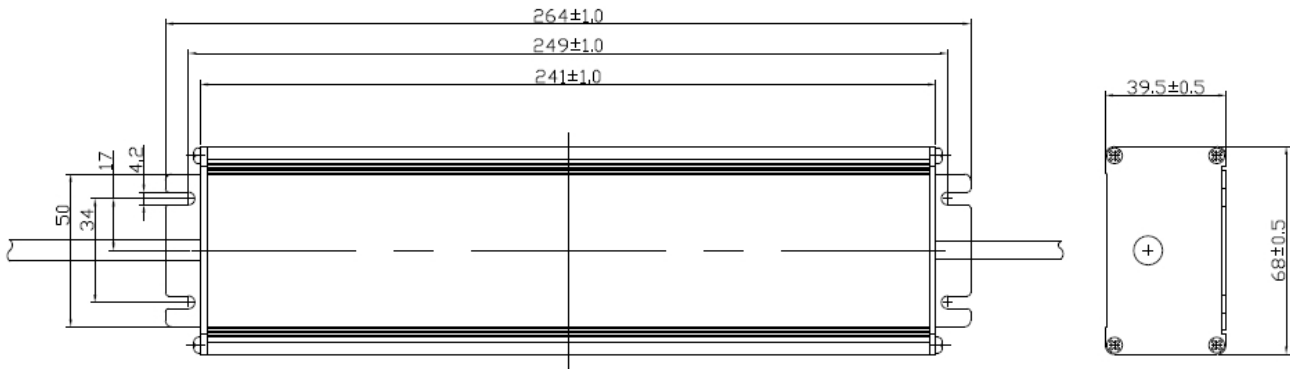

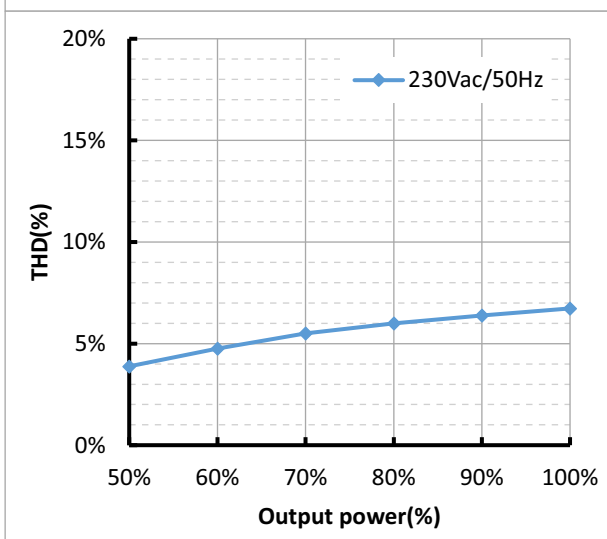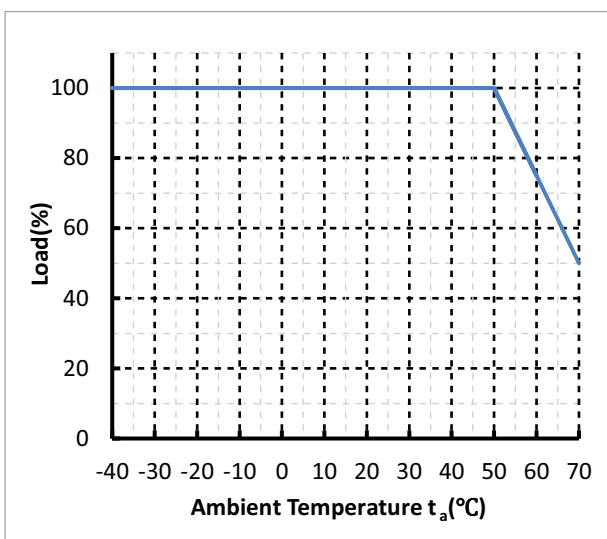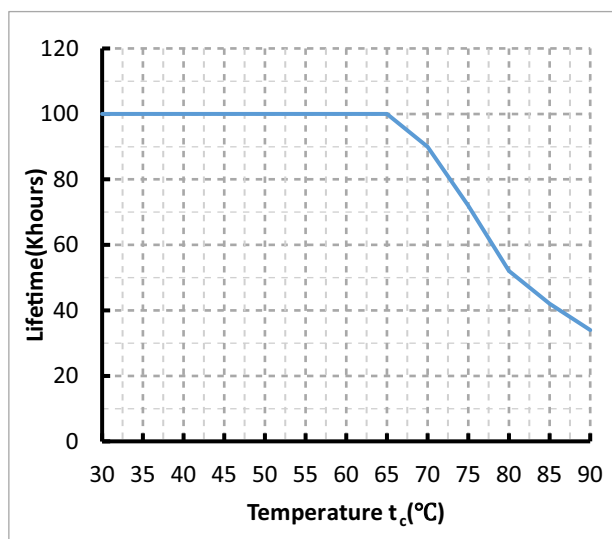

Remarks

- **Output short circuit protection:** auto reversible when fault removed.
- **Output overload protection:** auto reversible when fault removed.
- **Over temperature protection:** auto reversible when fault removed. Temperature on t_c point must not exceed t_c max. Derating for LED load is necessary if t_a is higher than 50°C.
- **No load operation:** do not put a switch between ECG and load.
- **Waterproof:** the driver is designed for outdoor installation with IP66 / IP67 protection grade. Input and output cables must be connected by means of a sealed cable clamp.
- **LED wire length:** 10 m EMI verified. Max cable length of 10 m recommended.
EMI may be interfered by on site installation condition with longer cable. For longer cable (> 10 m), cable with larger cross section area is needed to cover voltage drop.
- **Exit cables:** the supplied, internally wired cables cannot be replaced; if the cord is damaged, the LED driver must be replaced.
- Keep enough distance from the ceiling corner or other drivers to avoid overheat. The driver must not be covered by flammable materials. At critical conditions showed by below picture (Full load, $t_a = 50^\circ\text{C}$, driver on the corner of ceiling), refer to below distance. At normal installation, distance can be shorter but temperature at t_c point must be within t_c max.
- For detailed application notes, please refer to user instructions.