


PRODUCT DATA SHEET

LIGHT DUTY ALUMINIUM PROFILE
COLOR : ANODISED SILVER

8MM * 35MM
LENGTH : 3.01M

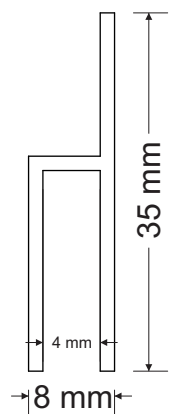

P-ED1
ALUMINIUM PROFILE

SPECIFICATION

FINISHES

MATERIAL : ALUMINUM
COLOR : SILVER ANODIZED
FINISH TREATMENT : MATT

NOTE:

- 1.ALL SPECIFICATIONS NEED TO COMPLY WITH ALL RESPECTIVE FEDERAL, LOCAL, AND LANDLORD-SPECIFIC CODES AND REGULATIONS.
- 2.WHERE THE CONTRACTOR PLANS TO USE MATERIALS THAT HAVE ALREADY BEEN USED IN THE BASE BUILD, THE CONTRACTOR SHOULD CONSIDER THE SAME MATERIAL AND SUPPLIER FOR FURTHER WORKS, AS REQUIRED.

TECHNICAL PARAMETERS

ITEM CODE	P-ED1 LIGHT DUTY
PROFILE SIZE	35MM X 3010MM
ALUMINUM THICKNESS	1.5MM
WEIGHT	AROUND 0.255KG/M
OPEN WAY	FABRIC EMBEDDED
COLOUR	SILVER ANODIZED
ASSEMBLING	USE METAL CONNECTOR TO COMBINE ALUMINIUM PROFILE INTO A FRAME
LENGTH	3M/PIECE, OTHER LENGTH CAN BE CUSTOMIZED
TYPE	SINGLE SIDE
INSTALLATION	HANGING / WALL
USAGE	PICTURE FRAME
GRAPHICS MATERIAL	FABRIC OR PVC
APPLICATION	TRADESHOW, SHOPPING MALL, AIRPORT, METRO STATION, ETC.



PROOF STRESS	:	170 MIN MPA
TENSILE STRENGTH	:	215 MIN MPA
ELONGATION A50 MM	:	8 MIN%
HARDNESS BRINELL	:	75 HB
ELONGATION A	:	10 MIN%

CHEMICAL PROPERTIES

CHEMICAL ANALYSIS (%) :

	MIN	MAX
si	0.2	0.6
Fe	0.0	0.35
Mg	0.0	0.1
Mn	0.45	0.9

DIMENSION

UNIT IN MM

OVERALL :

WIDTH	:	35 MM
LENGTH	:	3010 MM
THICKNESS	:	1.5 MM
WEIGHT	:	AROUND 0.255KG/M

EXECUTION

GENERAL	:	REFER TO THE DRAWINGS AND DESIGN CATALOGUE.
CONSTRUCTION	:	CONSTRUCTION AND MOUNTING METHOD TO BE DONE ACCORDING TO MANUFACTURE SPECIFICATION.