



PRODUCT DATA SHEET

LINEAR ALUMINIUM PROFILE
COLOR : ANODISED SILVER

16MM * 16MM
LENGTH : 3M

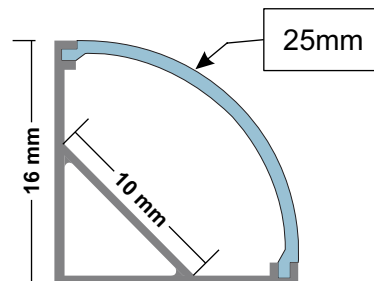

ALUMINIUM LED PROFILE
FOR CORNER MOUNTED

SPECIFICATION

FINISHES

MATERIAL	: ALUMINUM
COLOR	: SILVER ANODIZED
FINISH TREATMENT	: MATT

NOTE:

- 1.GDS-1616 TRIANGLE ARC SHAPED LED PROFILE IS TO BE USED FOR THE CONNECTION POSITION AT THE RIGHT ANGLE,WITH LED LIGHT SOURCE TO SCATTER EVENLY INSIDE THE CABINET ,ALSO CAN BE USED FOR FURNITURE LAMINATE WITH FRONT BLOCKING STRIP FOR LIGHT TO COME FROM LAMINATE TO LIGHT THE SPACE THEN ACHIEVE BETTER AMAZING LIGHTING EXPERIENCE.
- 2.GDS-1616 LED PROFILE SUITABLE FOR CUPBOARD BOTTOM,CUPBOARD INSIDE,WARDROBE BOTTOM,WARDROBE INSIDE COMMERCIAL SPACE LIGHTING ,ETC..

TECHNICAL PARAMETERS

ITEM CODE	GDS-LP16.16
PROFILE SIZE	16 X 16 X 3000 MM
ALUMINUM THICKNESS	1MM
WEIGHT	AROUND 0.124KG/M
ALLOY & TEMPER	6063,T5
STANDARD	GB5237-2008
COLOUR	SILVER ANODIZED OTHER COLORS CAN BE CUSTOMIZED
LENGTH	3M/PIECE, OTHER LENGTH CAN BE CUSTOMIZED
TYPE	SINGLE SIDE
INSTALLATION	EXPOSED TYPE
LIGHT SOURCE	LED SMD2835
APPLICATION	CABINET, SHOW CASE, ETC.

ALUMINIUM LED PROFILE FOR CONNER MOUNTED

SECTION VIEW



ITEM CODE : GDS-LP16.6

PC COVER : PC(MILKY)

LAMP BODY MATERIAL : 6063-T5 ALUMINIUM

PCB WIDTH : UNDER 11 MM


SURFACE COLOR : SILVER ANODIZED

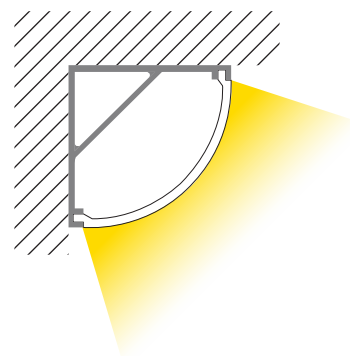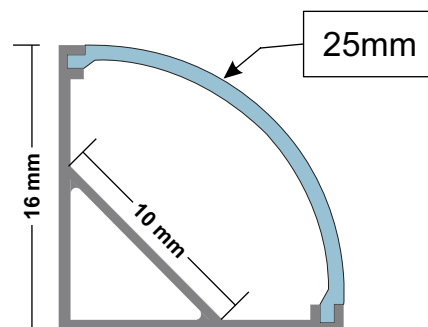

THE PLASTIC END CAPS
THE METAL CLIPS



TECHNICAL DETAILS

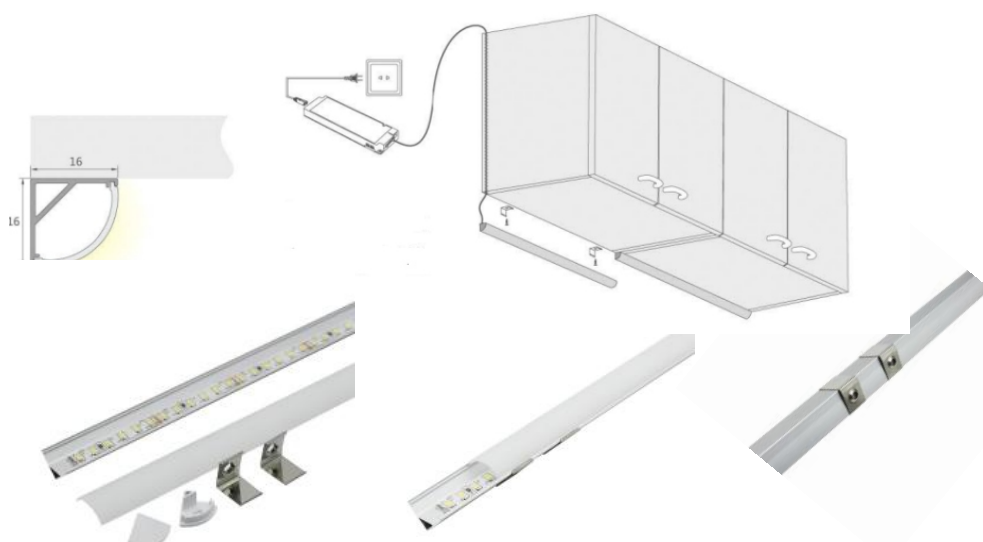

Size mm	Power W	Voltage V	LED type	CCT K	Lamp body material	Surface finish	Lead length	Installation
300	4	12V/24V	SMD2835	WW:3000K NW:4000K CW:6500K	#6063 Aluminum	Matt silver /black	2 m	Bracket/ 3M tape
500	6							
600	8							
800	10							
1000	12							

EXAMPLE OF CASE FOR REFERENCE

